Network Layer

Instructor: C. Pu (Ph.D., Assistant Professor)

Lecture 15

puc@marshall.edu



Network Layer Functions

Recall: two network-layer functions:

- forwarding: move packets from router's input to appropriate router output
- routing: determine route taken by packets from source to destination

data plane

control plane


Two approaches to structuring network control plane:

- per-router control (traditional)
- logically centralized control (software defined networking)



Per-router Control Plane


Individual routing algorithm components *in each and every router* interact with each other in control plane to compute forwarding tables

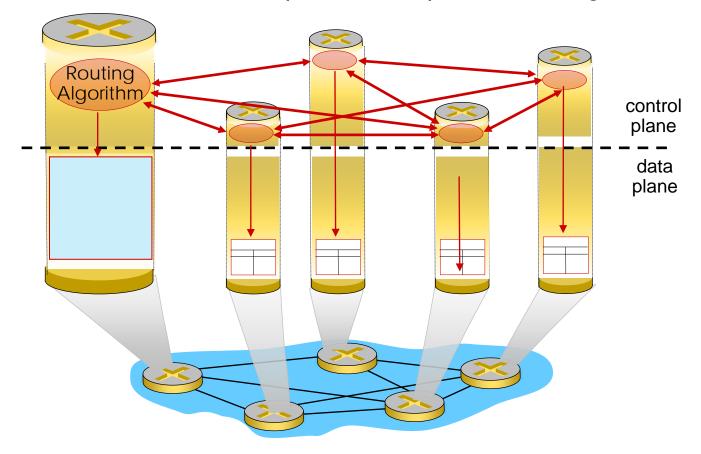



Logically Centralized Control Plane

A distinct (typically remote) controller interacts with local control agents (CAs) in routers to compute forwarding tables

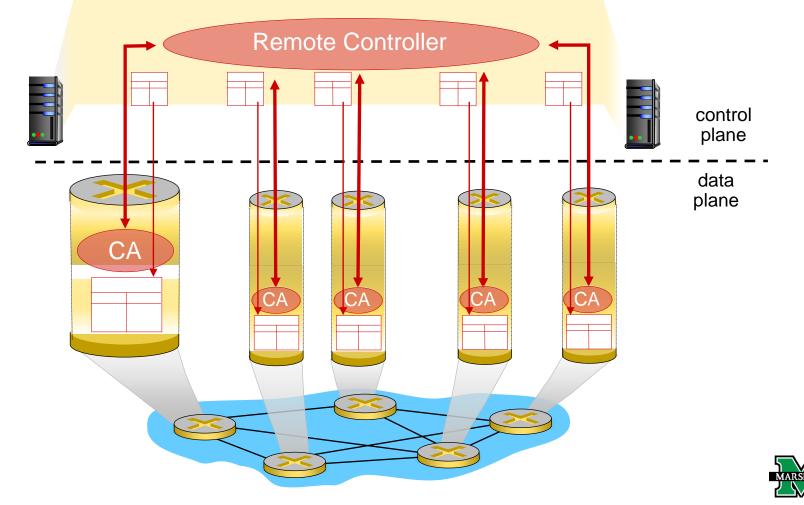



Routing protocol goal:

 determine "good" paths (equivalently, routes), from sending hosts to receiving host, through network of routers

path:

- sequence of routers packets will traverse in going from given initial source host to given final destination host
- "good": least "cost", "fastest", "least congested"
- routing: a "top-10" networking challenge!





Routing Protocols


- A host is attached directly to one router, the *default router* for the host.
- Whenever a host sends a packet, the packet is transferred to its default router.
- We refer to the default router of the source host as the source router and the default router of the destination host as the destination router.
- The problem of routing a packet from source host to destination host

==

the problem of routing the packet from source router to destination router



Graph Abstraction

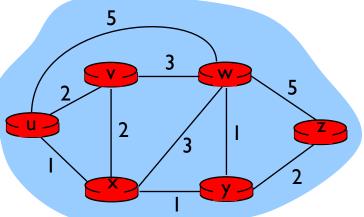


Graph: G = (N, E)

N = set of routers = { u, v, w, x, y, z }

 $E = set of links = \{ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) \}$



Graph Abstraction: Cost

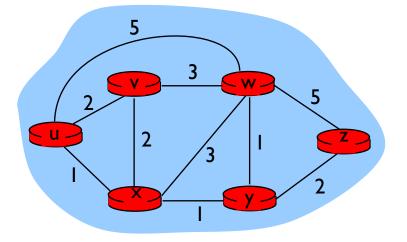

- c(x, x') = cost of link (x, x')
 - e.g., c(w, z) = 5

• cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

Cost of path
$$(x_1, x_2, x_3, ..., x_p) = c(x_1, x_2) + c(x_2, x_3) + ... + c(x_{p-1}, x_p)$$

Question: What's the least-cost path between u and z ?

Routing algorithm: algorithm that finds least-cost path



Routing Algorithm Classification

Global or decentralized information? Global routing algorithm:

- all routers have complete topology, link cost info
- "link state" algorithms

Decentralized routing algorithm:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Static or dynamic? Static routing algorithm:

- routes change slowly over time
 Dynamic routing algorithm:
- routes change more quickly
 - periodic update
 - in response to link cost changes



A Link-State Routing Algorithm


Dijkstra's algorithm

- net. Topology and link costs known
 to all nodes
 - accomplished via "link state
 broadcast"
 - all nodes have same info.
- compute least cost paths from one node ("source") to all other nodes
 - gives forwarding table for that node
- iterative: after k iterations, know least cost path to k dest.'s


Notation:

- c(x, y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v
- p(v): predecessor node along path from source to v
 - N': set of nodes whose least cost path definitively known






Dijsktra's Algorithm

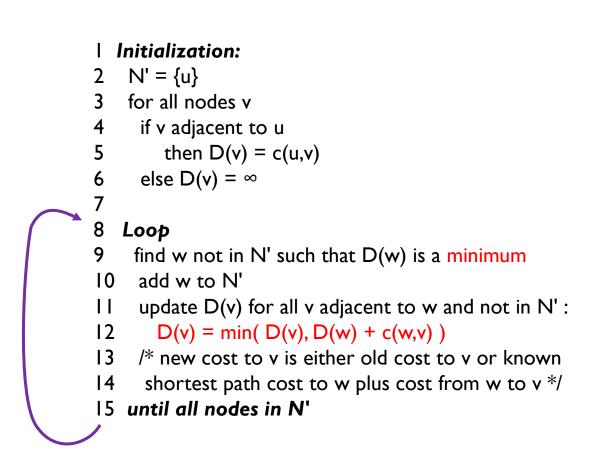



	Dijsktra's Algorithm: Example					
Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	I,u	∞	∞
	ux 🔶	2 ,u	4,x		2,x	∞
2	uxy₄	2 ,u	З,у			4,y
3	uxyv 🔶		3,y			4,y
4	uxyvw 🔶					4,y
5	uxyvwz 🗲					

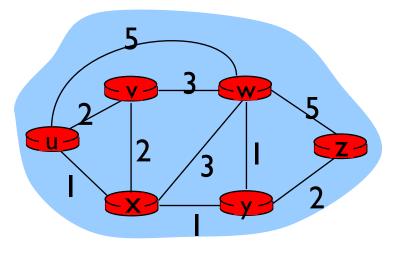



Dijsktra's Algorithm: Example (cont.)

<u>Resulting shortest-path tree from u:</u>

X

Resulting forwarding table in u:

destination	link	
v	(u,v)	
x	(u,x)	
у	(u,x)	
W	(u,x)	
Z	(u,x)	

